

Addendum #2

June 25, 2026

Lindsay Wellness Center

Pool Deck Renovation Project

DATE:6/24/26

Q: Under section one, C. Bid Proposal, bidding sheet, it specifies "The undersigned hereby certifies that he/she has a valid Class B contractors license with C53 Specialty certification". Does the General contractor have to have both the Class B license as well as the C53 specialty certification? or can the General contractor have the class B license and one of the subcontractors have the C53 specialty certification? Is a class C53 specialty certification required, if no work is being done on the swimming pools themselves?

A: If the prime contractor holds a Class B license, a subcontractor may hold the C53 specialty certification. If the prime contractor holds the C53 certification, a Class B license is not required.

Q: Is Colored concrete Stained, or Integral?

A: Integral color concrete. Match the existing concrete color as it appears now, not its original color.

Q: Please confirm no items are provided by owner.

A: No items are provided by owner.

Q: Please clarify what the budget bullet line item, "Change Order Review", entails? Please see page 9 of Section One, C. Bid Proposal.

A: Nothing specified at this time for this, you can write N/A.

Q: Please clarify what the Budget bullet line item, "Number of meetings included in the bid and cost for additional meetings requested by the City", entails? Please see page 9 of Section One, C. Bid Proposal.

A: Include the cost for any City-requested meetings that are not already included in your base bid. For example, if your bid includes one meeting per month for the project duration, identify the cost for any additional meetings. If this item does not apply, enter N/A.

Q: Per the Project Scope, the Therapy Pool Skimmers are included in the "Concrete Deck" line item, however the Budget section appears to separate them per the

“Format” instructions.

A: Please separate as described in the “Format” instructions.

Q: Per Add 1, we are adding a line item for new handrails. Do we need to separate the cost for polishing and refurbishing existing handrails into its own line item so they can be compared and options selected.

A: Yes that is fine, please break out both costs to be able to compare.

Q: Please provide Flag pole and flagpole sleeve information.

A: Part numbers for the flagpole and flagpole anchors:

#	QTY.	PART DESCRIPTION	PART #
1	4	PENTAIR PARAGON BACKSTROKE PENNANT STANCHION. (145" WALL THICKNESS, 1.90" DIAMETER)	KDI-35-760 38106
2	4	SLIDING COLLAR W/ EYEBOLT	KDI-35-743 38301
3	4	PENTAIR PARAGON BRONZE STANCHION ANCHOR WITH THREADED CAP (1.90 ID)	KDI-35-732 38201TCSZ
4	4	KEY FOR BRONZE STANCHION ANCHOR W/ THREADED CAP	KDI-35-742 38202
5	2	SPECIAL ORDER LENGTH BACKSTROKE LINE AND PENNANTS (ALTERNATING BLUE WHITE COLOR PREFERENCE) (80' LENGTH SHOULD BE DETERMINED AT BID WALK WITH ONSITE MEASUREMENTS	SPA-115C-C1
6	2	EZ-TENSIONER & SPRING (MAY OR MAY NOT BE NEEDED SHOULD VERIFY ON BID WALK)	RCH-35-1025 600333AAAKIT

Q: Please provide ADA Lift Anchor information.

A: After further review the anchor for the ADA-Lift is in the pool shell. Providing new ADA lift anchors will not be necessary at this time.

Q: Who is responsible for testing and inspections?

A: Providing special inspections will be the responsibility of the contractor. Building department inspections will be scheduled by the contractor with the city of Lindsay.

Q: We request the following information/clarification: Sheet BP-002 has a Part Description List. What is the purpose of this list as most of these items are not identified on the plans?

A: The list identifies components that must be purchased for the project, though it may not include every required item. For example, demolition of the concrete deck may damage handrail anchors, flagpole anchors, requiring replacement. Please let us know if additional details are needed for any item on the equipment list.

Q: On the Part Description List on Sheet BP-002 item #5 says 80' length should be determined at bid walk with onsite measurements. As the jobwalk was not mandatory, and we were unable to attend, was this measurement verified?

A: 80' length has been verified.

Q: On the Part Description List on Sheet BP-002 item #6 May or May not be needed should verify on bid walk. As the jobwalk was not mandatory, and we were unable to attend, was this verified? Please advise if we are including.


A: Please include.

Q: Who is responsible for Permits?

A: City will pull permits and City will provide the plans.

Q: Can pictures of the Water Features to be removed per Addenda 1 be provided please?

A: Water features:

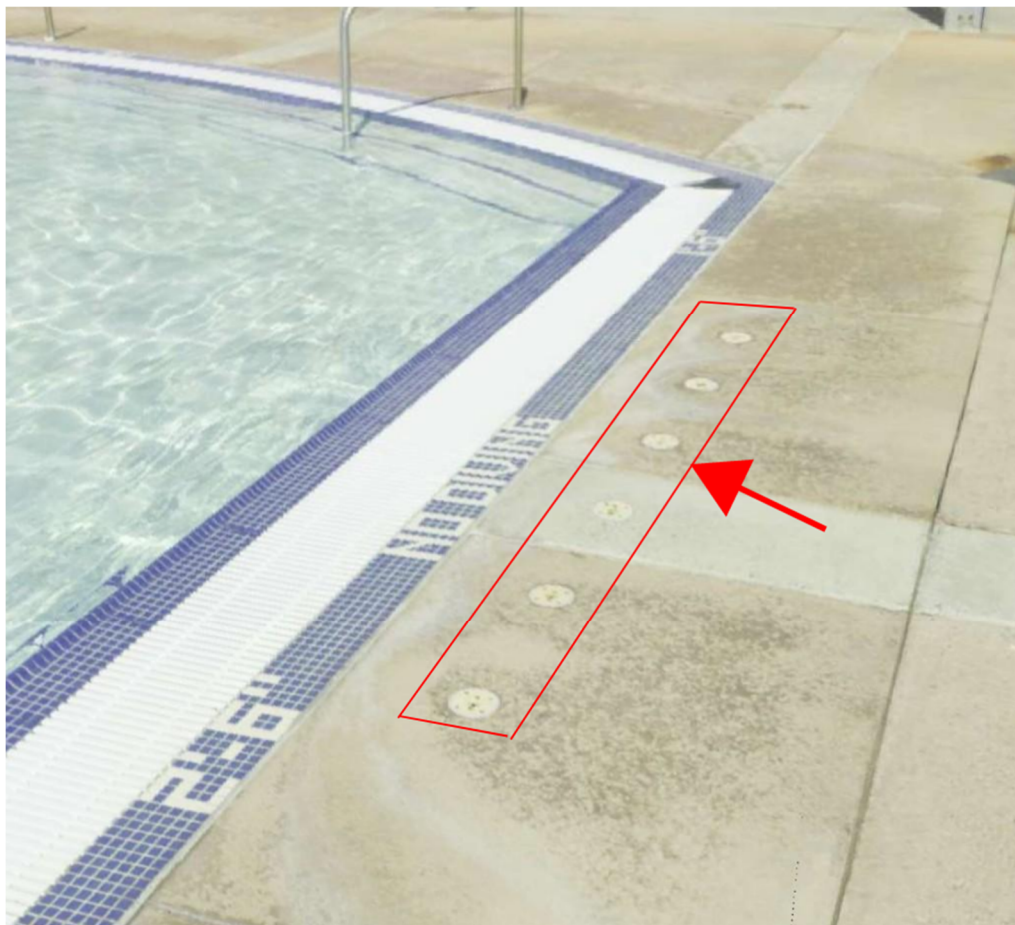

Q: Should we include Xypex Admix C-500 for the Pool Deck concrete mix? This Admix has been used in many of our Pool Deck projects such as with the City of Shafter at

their Aquatic Center and Bakersfield College.“Xypex Admix is a powdered crystalline waterproofing additive that is batched directly into concrete?

A: Not at this time, because admix C-500 may alter the final color.

Q: Per the addendum there are some revised plan sheets, but they were not included on the addendum. Can you please advise.

A: Revised plans were uploaded to the website.

Q: On plan sheet L-002 the slot drain is shown in a U-shape. Since the slot drain pipe is 6” schedule 40 pvc and not flexible, is there another piping material intended to use here that can bend and follow the deck design at this location?

A: This will be answered in Addendum #3 that will be uploaded on Monday 6/29/26.

Q: On the pool deck plan sheets there are areas of the pool deck that are called out to be “Color Concrete w/ salt fin.” What color is the concrete at these locations?

Different concrete colors have vastly different price ranges. For example tan color concrete may add \$50 per yard cost but blue concrete could increase cost \$1,500 per yard.

A: The existing concrete has faded, so an exact color-code match cannot be provided. Please work with your vendor to identify the closest available match.

Q: Is the new scoreboard owner furnished contractor installed or is it contractor furnished and installed?

A: New scoreboard will be contractor furnished.

I acknowledge receipt of Addendum #2 as described above:

Signature: Armando M. da Silva

Printed Name: Armando M. da Silva

Company: City of Lindsay

Date: 06/25/2026